


CITATION — CEILING HUNG

* CRITICAL DIMENSION

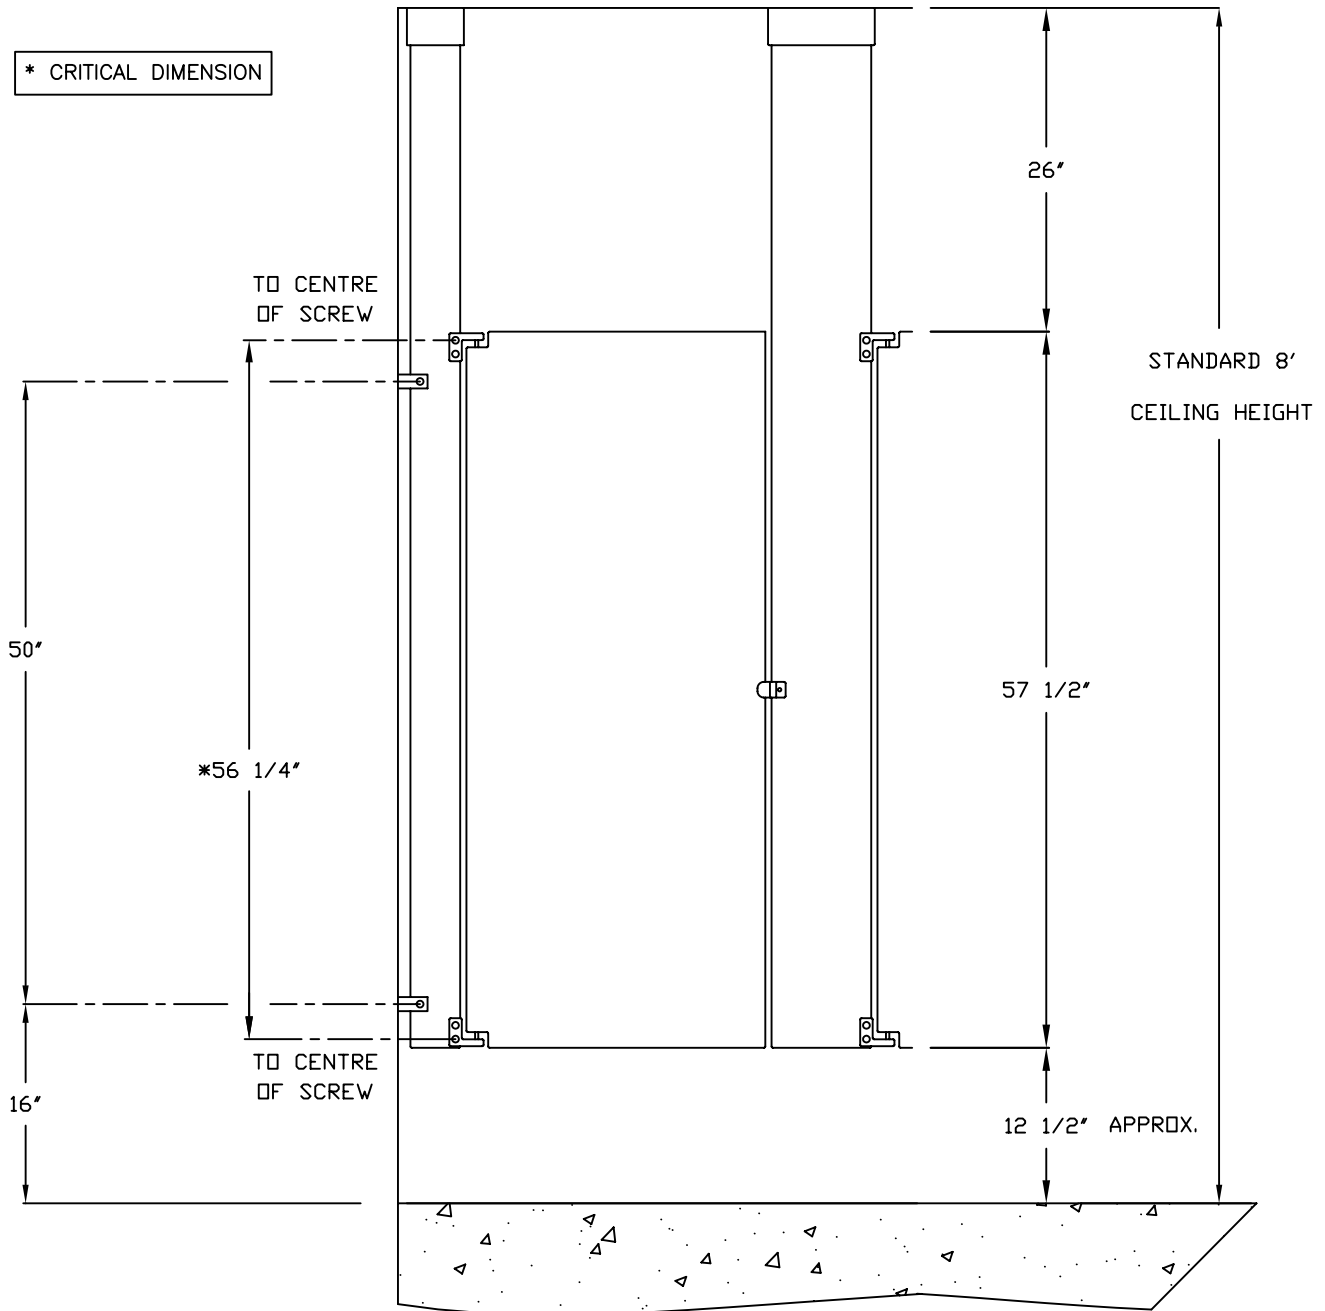

3/8" HEX NUT (509-303)

3/8" LOCK WASHER (509-203)

3/8" BEVEL WASHER
CAST (509-205)

STRUCTURAL MEMBER
BY OTHERS

3/8" LOCK WASHER (509-203)

3/8" HEX NUT (509-303)

3/8" FLAT WASHER (509-204)

#8 x 1/2" ROBERTSON #3 S.M.S.
(107-316)

CARRYING CHANNEL 10 GA.

3" STAINLESS STEEL SHOE

3/8" DIA.-16T.P.I. STUD (509-305)

DRILLING OF STRUCTURAL
MEMBER FOR STUDS AND
INSTALLATION OF STUDS
TO BE BY OTHERS.

* KEY CHANNEL
DIMENSION VARIES

2" PROJEC.

8'0" MAXIMUM
FINISHED FLOOR
TO FINISHED CEILING

IMPORTANT GENERAL CONTRACTORS
TO INSTALL 3 1/2" WOOD BLOCKING
BEHIND DRYWALL OR PLASTERED
WALLS FOR PANEL BRACKETS

GENERAL STORAGE SYSTEMS

PRINTED IN CANADA
FORM# 2C.2 07/05